




TRX Krzysztof Kryński

Description of the ISDN BRI S/T interface board

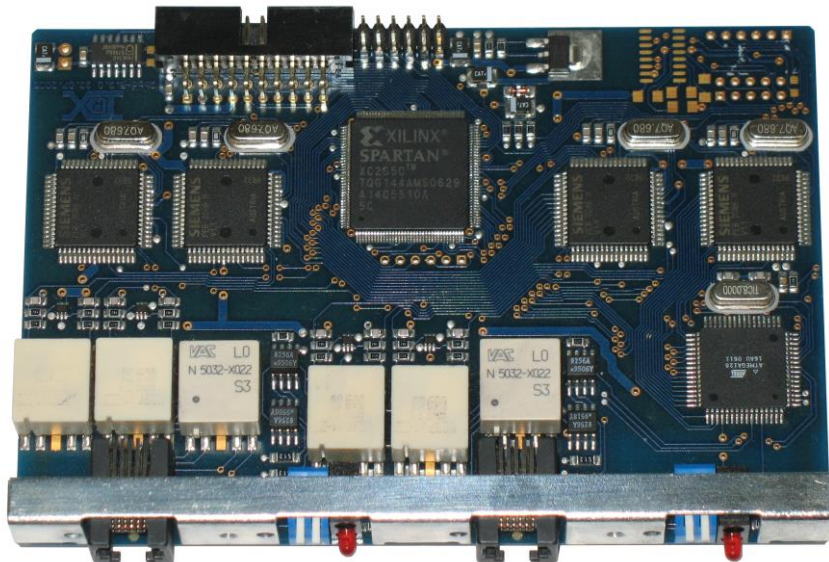

No. of lines:	2 or 1
No. of channels:	4 or 2
Input connector:	RJ-12
Connection mode:	in parallel
Power consumption:	< 0,5 W
Supported standards and protocols:	S/T interface (I.430), G.711 (Alaw) coding, DSS1 signaling: Q.921, Q931
Basic features:	<ul style="list-style-type: none">- recording of audio signal from interface board's channels- recording of calling and called party numbers- collection COLP number (if available)- recording of unconnected calls- signaling ISDN line status (LED)
Additional features:	<ul style="list-style-type: none">- collection call receiving waiting time- BOSCH TN1R6 protocol support- remote firmware upgrade is possible- other (on request)
Dimensions (W x H x D):	132 x 17 x 94