




TRX Krzysztof Kryński

Description of the phone system interface board

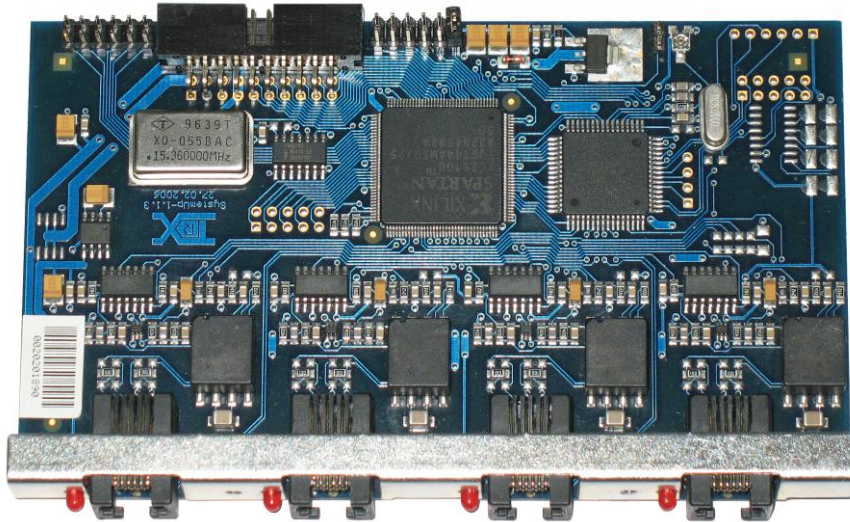

No. of lines:	4 or 2
No. of channels:	4 or 2
Input connector:	RJ-12
Connection mode:	in parallel
Power consumption:	< 0,5 W
Supported phone system standards:	Alcatel, Bosch, Coral, DGT, Ericsson, Kapsch, LG, Avaya, Matra, Panasonic, Philips, Platan, Siemens, Slican <u>one system on one board</u>
Basic features:	<ul style="list-style-type: none">- recording of audio signal from interface board's channels- recording of the phone display content (<i>except DGT</i>)- recording of called party number- recording of unconnected calls- full support for two phones on the line (<i>Panasonic, Siemens, Alcatel</i>)
Additional features:	<ul style="list-style-type: none">- registration records from the first incoming ring- recording control with the function keys- remote firmware upgrade or change of the supported system is possible- other (on request)
Dimensions (W x H x D):	132 x 17 x 94